




PALMETTO

Customer:	DUPONT-NEW JOHNSONVILLE
Customer Model:	S22 BCSLS TYPE D (CP-17-298-A00852198)
Description:	35" X 35" X 24"
Style:	4 Panel/Top Spout / Bottom Petal closure- Remote release

Date:	01/13/2017
Inventory ID:	3078
Palmetto Model:	S22 BCSLS TYPE D
Safety Working Load	1102 Lbs
Safety Factor:	6:1

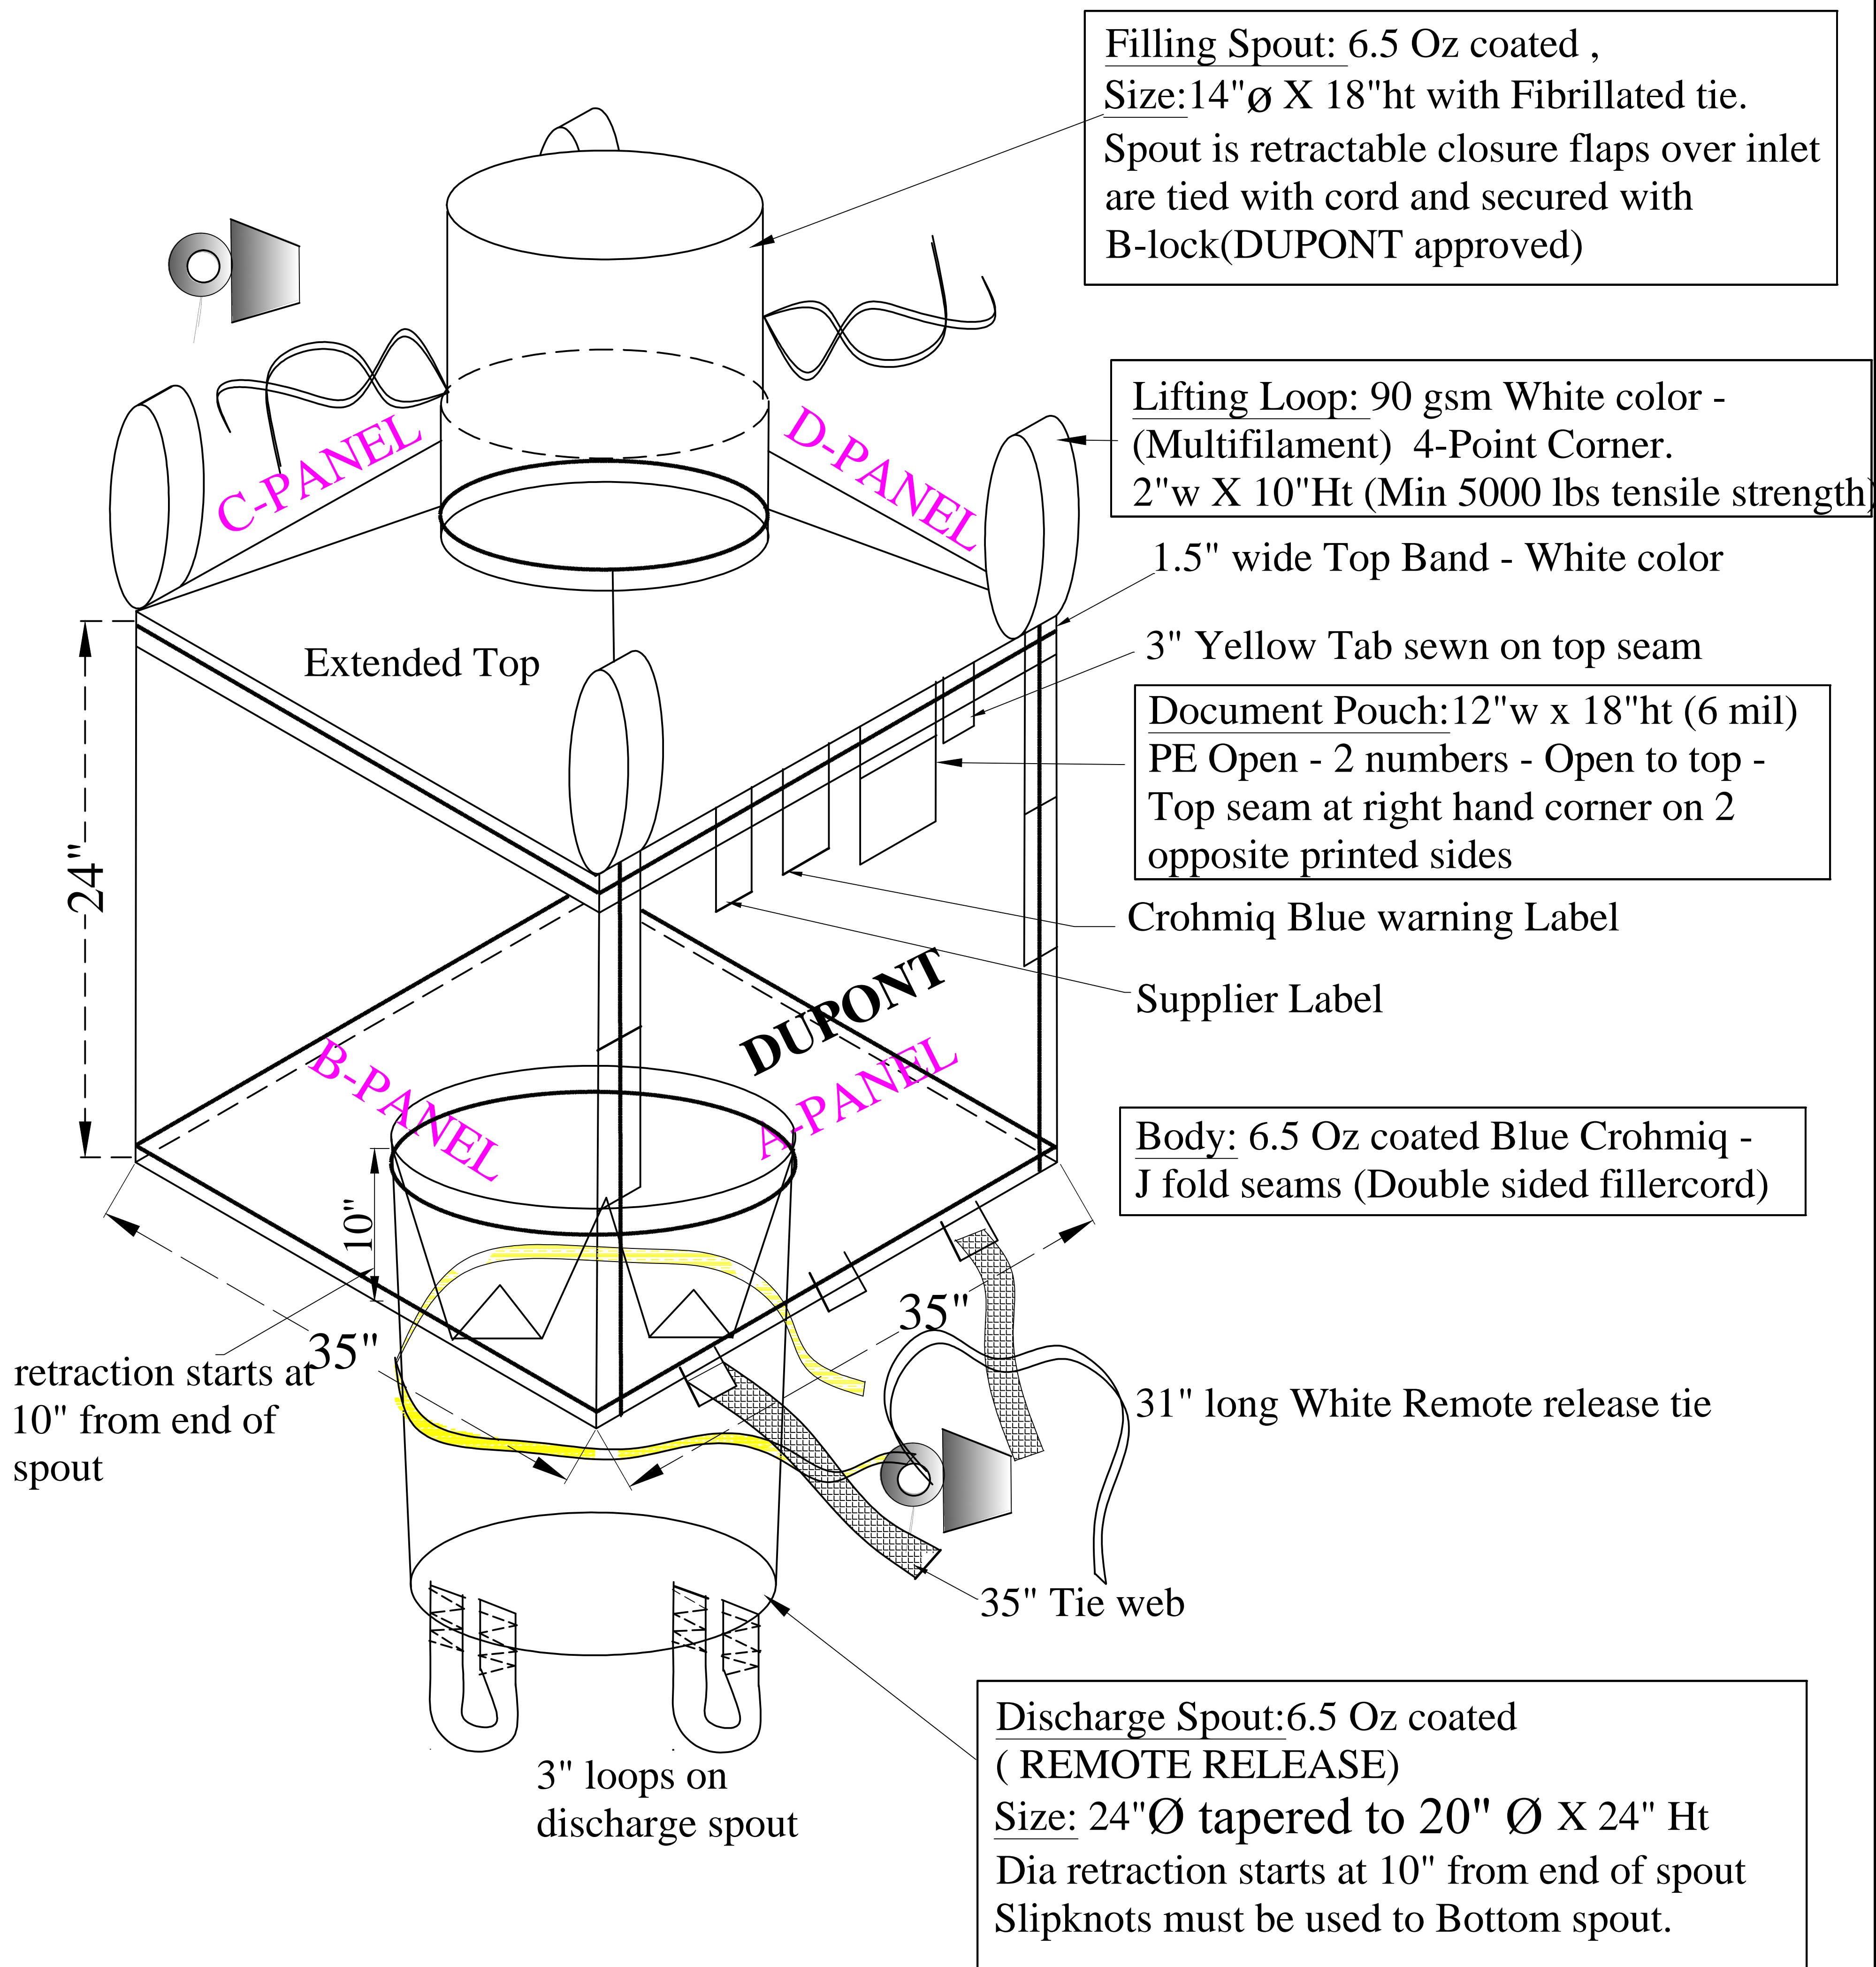

Specification Details:

Model: S22 BCSLS TYPE D

Size: 35" x 35" x 24"

No	Name	Specification
1	Body (4-Panel)	6.5 Oz coated Blue crohmiq - J Fold seams (Double sided fillercord)
2	Extended Top	Extended Top panel is oversized and Pleated
3	Filling Spout	6.5 Oz coated (14"Ø x 18" Ht) with Fibrillated tie. (Double sided fillercord) Spout is retractable closure flaps over inlet are tied with cord and secured with B-lock (DUPONT approved)
4	Discharge Spout	6.5 Oz Coated, Remote Release Size : 24"Ø x 24" Ht (Double sided fillercord)
5	Lift Loops	2"w X 10"Ht -4 point corner (90 gsm) -White Color loop Multifilament (Minimum 5000 lbs tensile strength)
6	Document Pouch	12" x 18" (6 Mil) - 2 numbers Open to top facing front on printed sides Top seam - at right hand corner
7	Top Band	1.5" wide Top Band - White color (Minimum 2000 lbs tensile strength)
8	Printing	Using Black color Two opposite sides
9	Label	1. Palmetto Label 2. Crohmiq Blue warning label

DISCHARGE SPOUT - Tapers from 24"Ø to 20"Ø at bottom.

retraction starts at 10" from end of spout. Bottom spout is tied upto side of bag with 3" loops on discharge spout and each 35" tie webs attached to side/Bottom of bag. Slip knots must be used to tie bottom spout. The cord used on discharge spout will be yellow color and secured with B-lock (DUPONT approved)