


## PALMETTO

Customer Model:	MILLENNIUM CHEMICALS GPM-0203
Description:	38.20"X 38.20" X 47.2"
Style:	4- Panel/Baffle/Top Spout/Bottom Remote Release

Date:	01.19.2017
Inventory ID:	1092
Palmetto Model:	S40BCELS-B-RR-
	TYPE D- BLUE
	CROHMIQ
Safety Working Load	2204 LBS
Safety Factor:	6:1

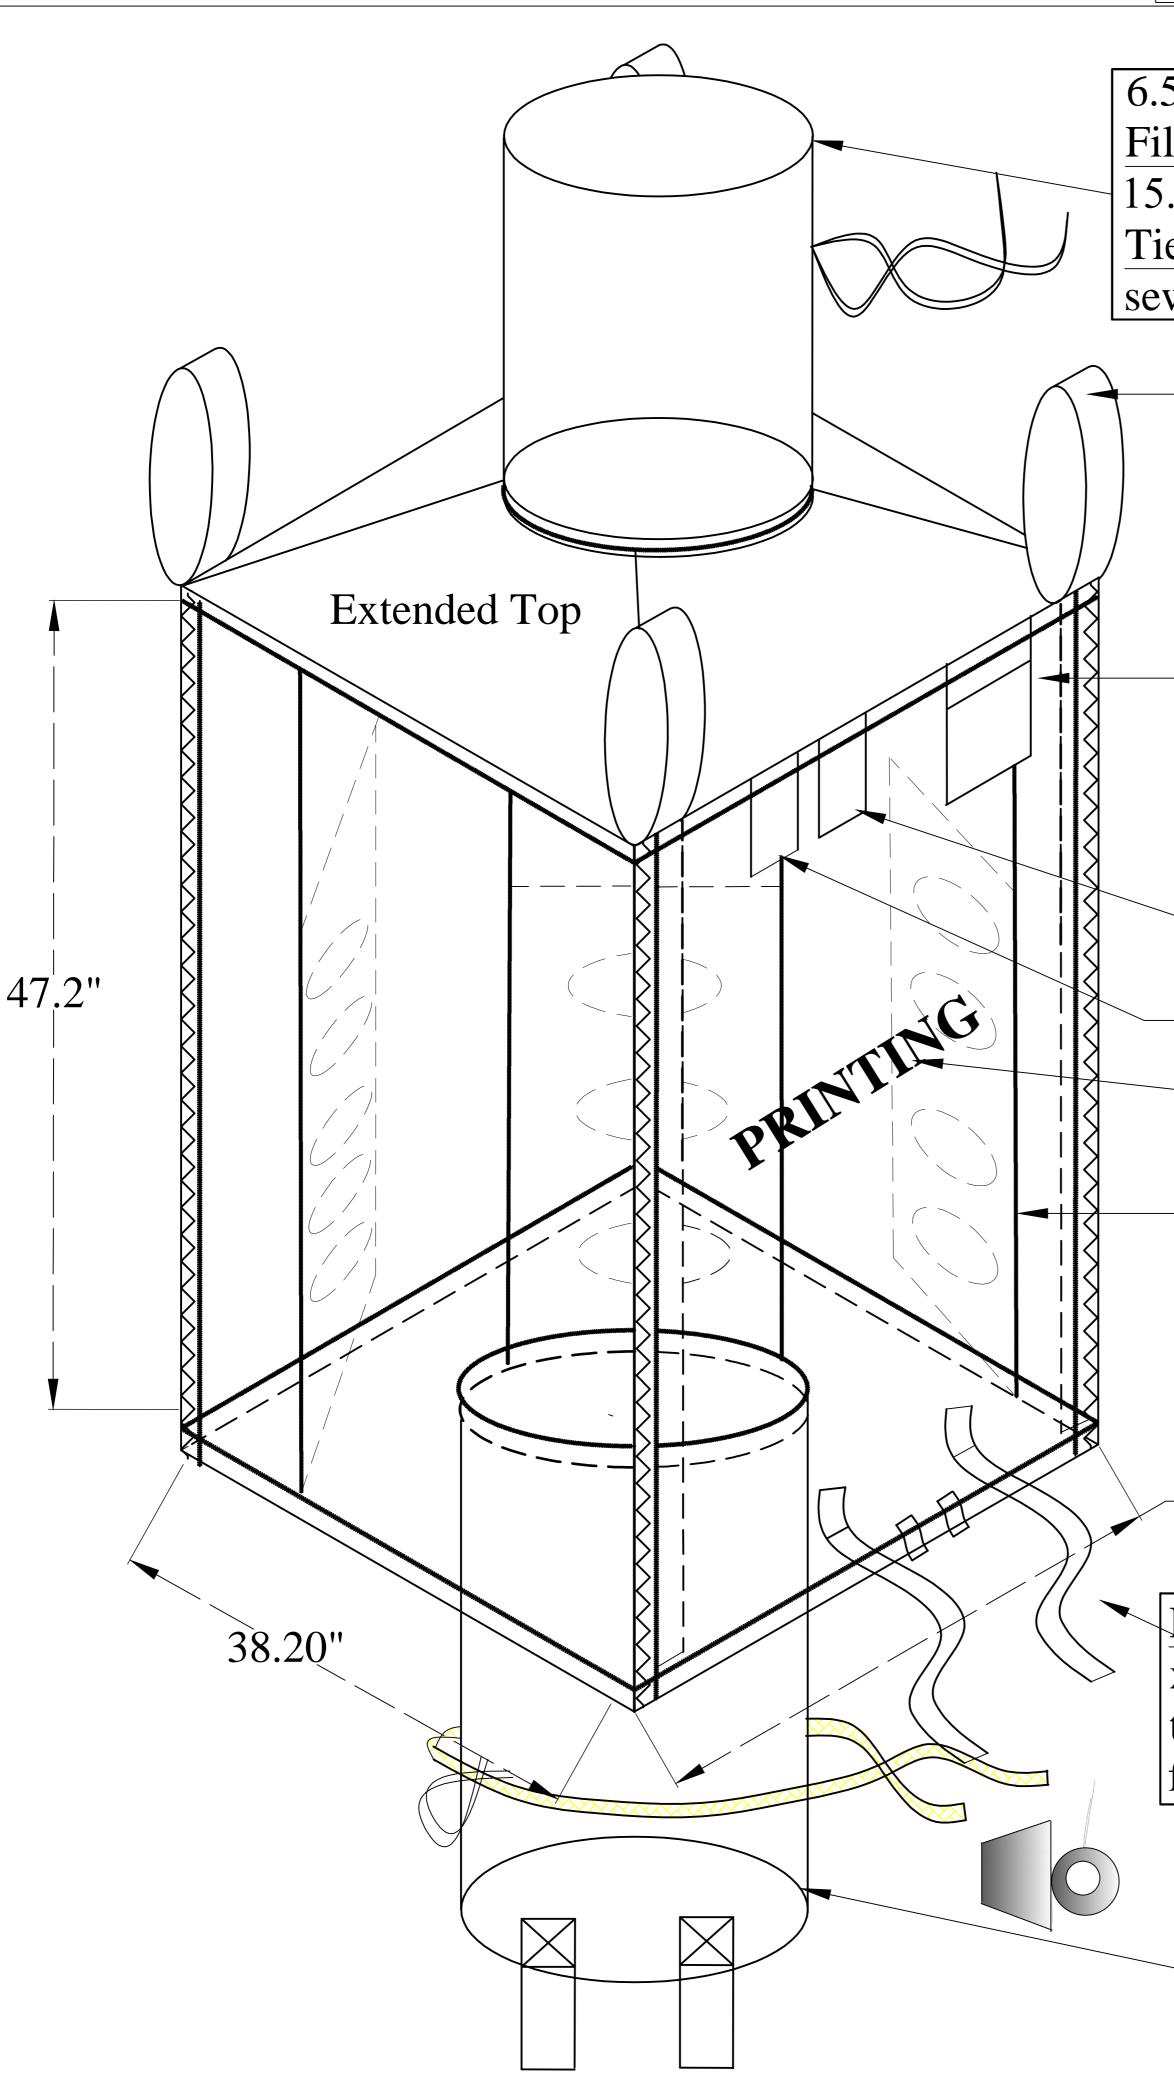

Discharge Spout Tie loop: 35 mm wide x

152 mm long sewn to bottom edge of

for securing to spout ties

spout on rear to form 75mm long loops

6.50z Coated Extended top

Filling Spout: (3 Oz coated Blue Crohmiq)
15.16" Ø X 14" Ht (Double sided fillercord)
Tie size:10mm x 900 mm Fibrillated tie. Tie
sewn 150mm down from top of spout

Lifting Loop:50 gsm (White color)
4-Point corner
Size:50mm W x 250mm Ht . Loop
attachement must be the entire length
of the bag side seam

Document Pouch: (PE Open)- 1 number
Size: 450 mmX 250 mm open to Top
Facing back at top seam(Slit opening in rear
50mm down from top - attach in right hand
side of remote spout tying side

New Type D warning label

-Supplier Label

2 Side Printing (Use Black Color) one side must be the Discharge tying side

Baffle: 6.5 Oz coated Blue crohmiq

Body: 6.5 Oz coated Blue crohmiq with Double sided filler cord. Main seams to be sewn with OVERLOCK stitching

-38.20"

Discharge Spout Ties: 35 mm wide webbing x 900 mm long sewn to form 50 mm loop for tying spout to front. Centered on base of bag front, 360 mm apart

Discharge Spout: 6.5 Oz coated crohmiq

Size: 23.62"Ø X 24.5"Ht (Double sided fillercord)

Spout Rope: 5mm x 2700 mm (Yellow Color

Multifillament) - Rope lock

Closure Tie:8mm webbing x 900 mm

(Yellow Color Multifilament)

## Specification Details

Model: S40 BCELS-B-RR TYPE D Size: 38.20" x 38.20" x 47.2"

No	Name	Specification
1	Body (4-Panel)	6.5 oz Coated .(Blue Crohmiq) using J folded seams - Double sided fillercord and mainseams to be sewn with overlock stitching
2	Extended Top	6.5 Oz coated Extended Top
3	Filling Spout	3.0 oz Coated Blue Crohmiq (Double sided fillercord) Size: 15.16"Ø X 14"ht Tie size: 10mm x 900 mm- Spout tie to be sewn 150 mm down from top of spout (Spout seam with web tie is to be positioned on the side to the right of remote release tying side)
4	Discharge Spout	6.5 oz coated Blue Crohmiq.  (Double sided fillercord)  (23.62" Ø X 24.5" ht) with  5mm x 2700 mm rope (Mulit fillament - yellow)  Closure tie webbing - 8 mm webbing x 900 mm - multifillment yellow (Outlet spout to be with Rope lock)
5	Lift Loops	4 Point Corner (50mm width X 250 mm height) - 50gsm White color
6	Baffles	6.5 0z Coated crohmiq
7	Document Pouch	(450mm vertical x 250 mm horizontal) PE open to Top Facing back - 1 number- Slit opening in rear, 50 mm down from top. Attach in top seam right hand side of remote spout tying side
8	Label	One Supplier Label and One Crohmiq Blue label - to be sewn on side to right to remote release