


PALMETTO

Customer: D3-200-14300 Description: 36" X 36" X 59" Style: U Panel/Top Drawstring / Bottom Drawstring closure		
U Panel/Top Drawstring /	Customer:	D3-200-14300
TI/IA·	Description:	36" X 36" X 59"
	Style:	_

Date:	13/07/2016
Inventory ID:	3449
Palmetto Model:	S56 BUELS - L
Safety Working Load	3000 Lbs
Safety Factor:	5:1

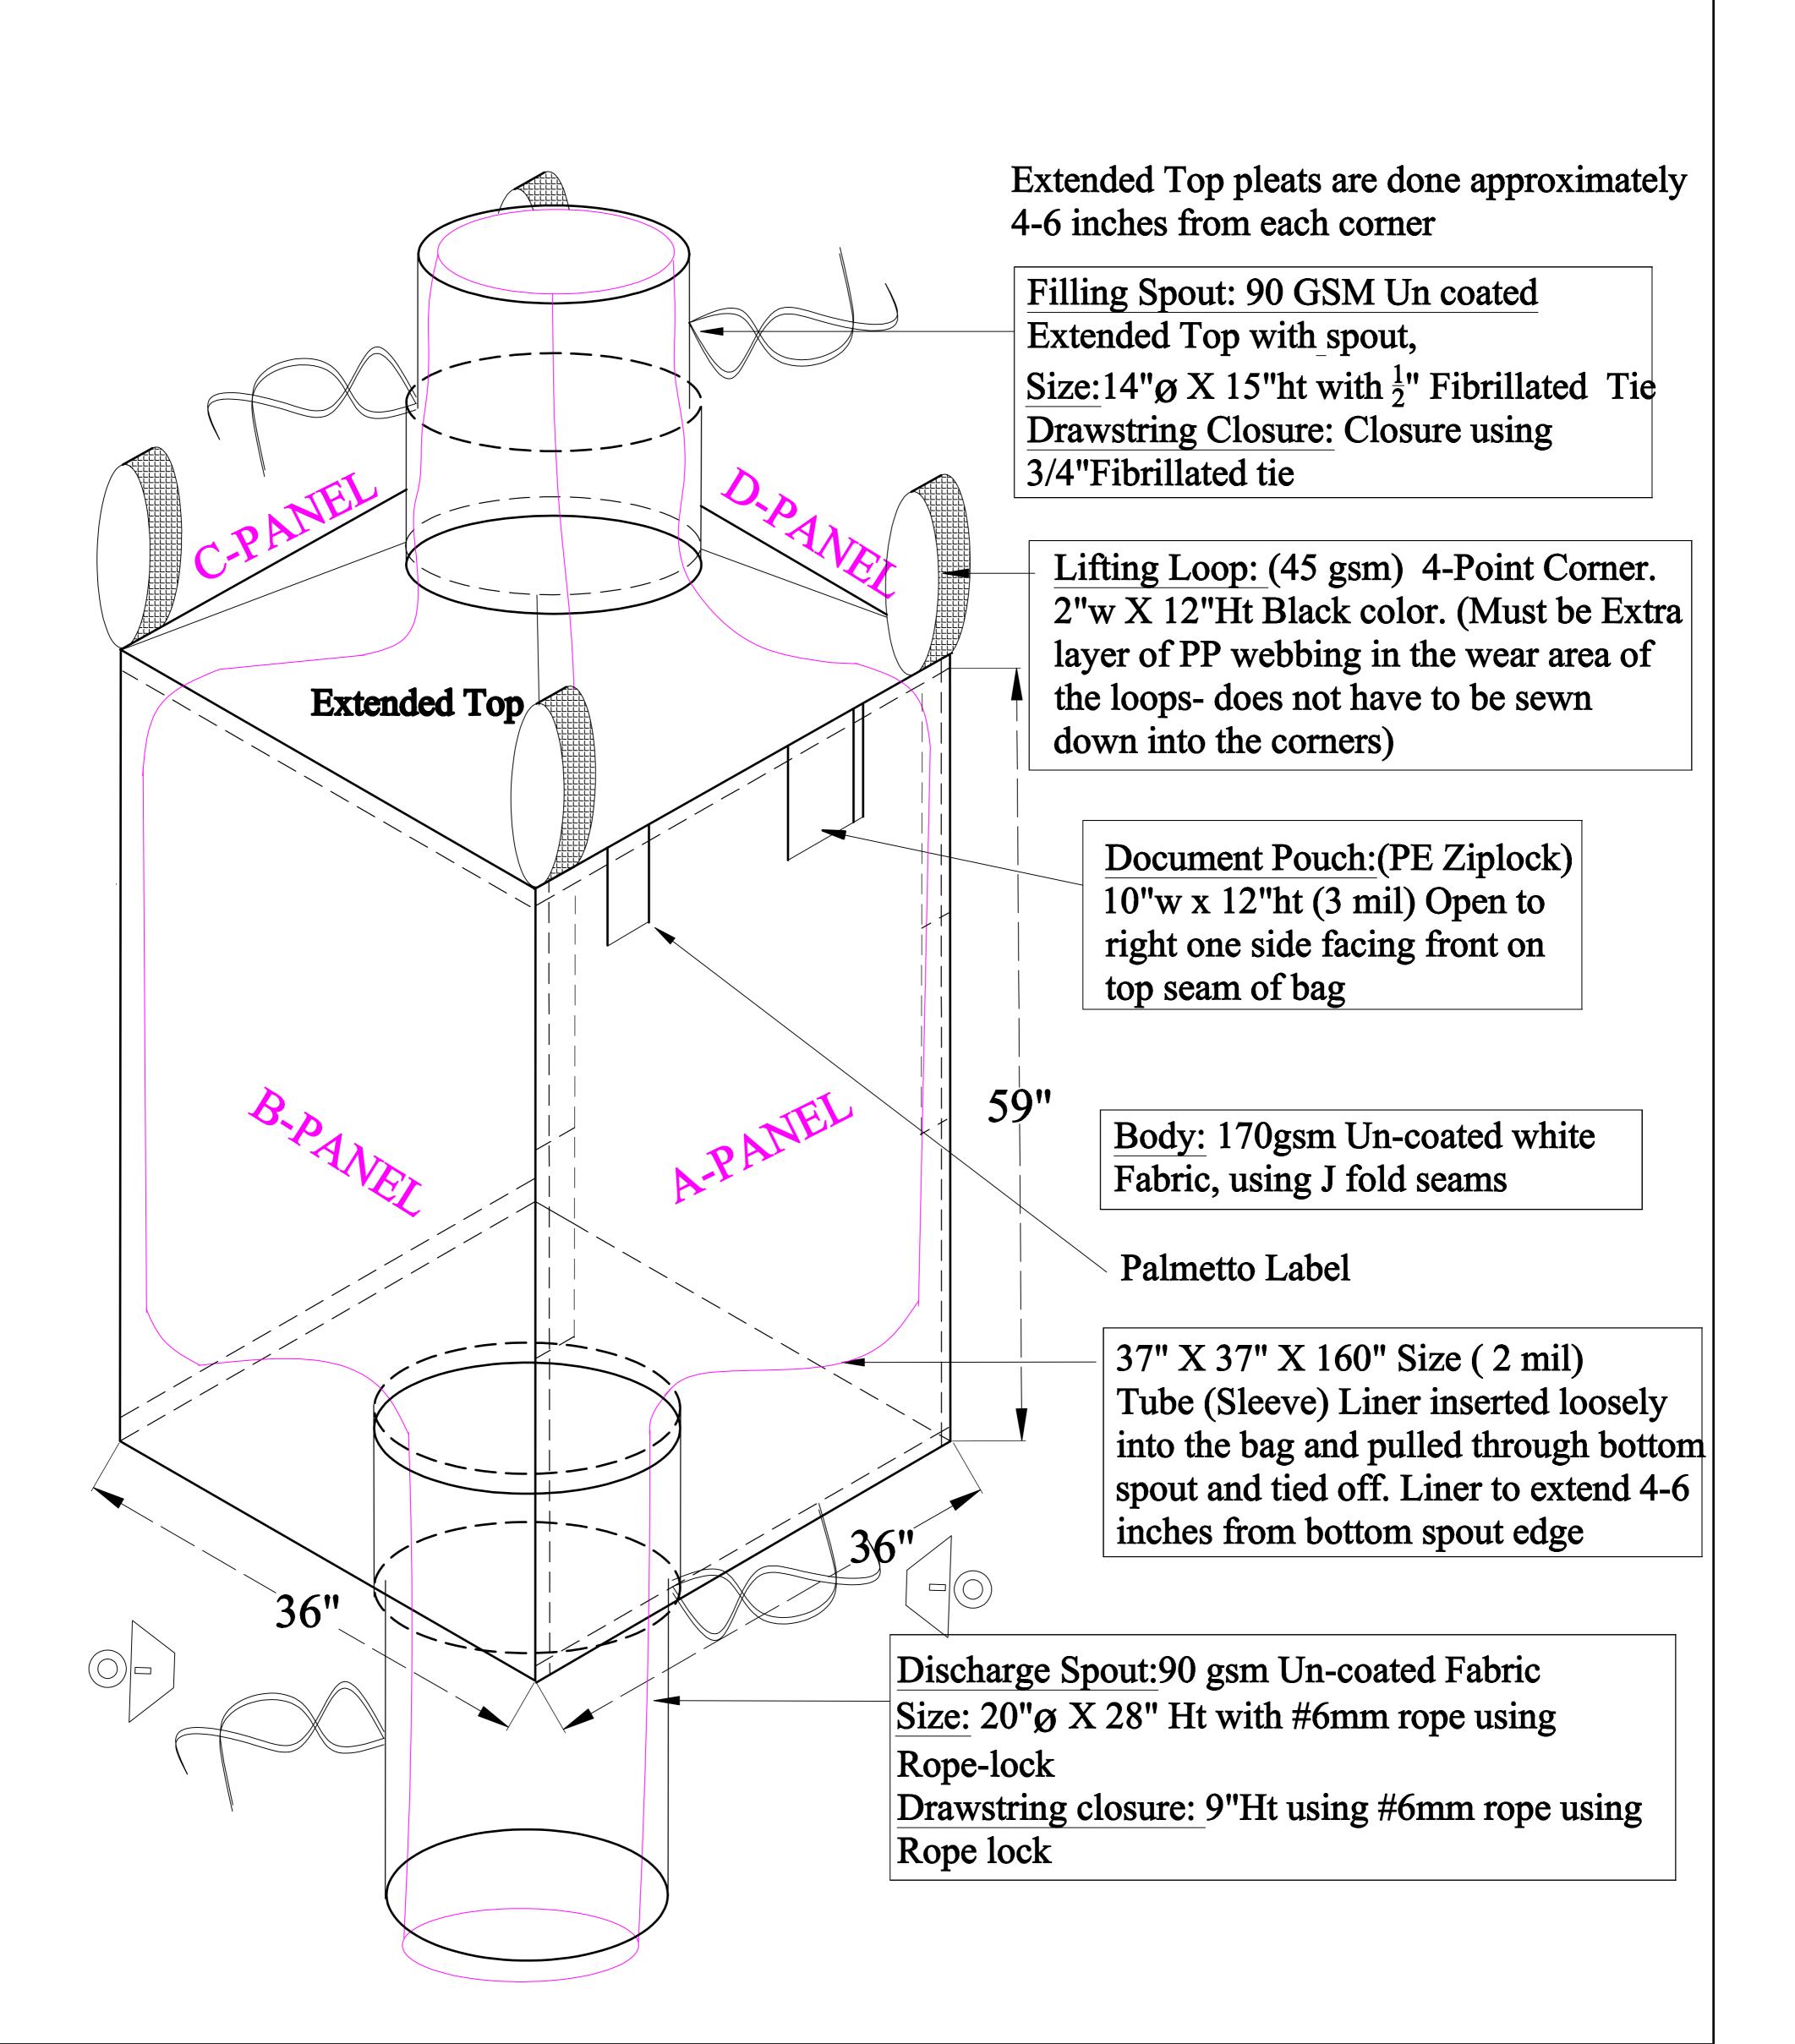

Specification Details:

Size: 36" x 36" x 59"

Model: S 56 BUELS -L

		THOUGHT S CO D CLLS	
			I
			l
 	\sim	♥ . •	

No	Name	Specification
1	Body (U-Panel)	170 gsm Un coated chain stitch using J fold seams
2	Inlet Spout	Extended Top with 90 gsm un coated spout (14"Ø x 15" Ht) with 1/2" Fibrillated tie Drawstring Closure: using 3/4" Fibrillated tie
3	Extended top	Extended top Pleats are done approximately 4-6 inches from corner
4	Outlet Spout	90 gsm Un Coated, 20"Ø x 28" Ht with #6 mm Rope with Rope-lock Drawstring Closure: 9"Ht #6 mm Rope with Rope lock
5	Lift Loops	2"(w) X 12"(Ht) -4 point corner (45 gsm) -Black Color loop. (Must be an extra layer of PP webbing in the wear area of the loops -does not have to be seam down into the corners)
6	Document Pouch	PE Ziplock - 10"w x 12" Ht (3 mil) - 1 number Open to Right side Facing front on bag
7	Tube Liner	37" x 37" x 160" size (2 mil) Tube (Sleeve) liner inserted loosely into bag and pulled through bottom spout and tied off. Liner to extend 4-6 inches from bottom spout edge
8	Label	1. Palmetto Label